
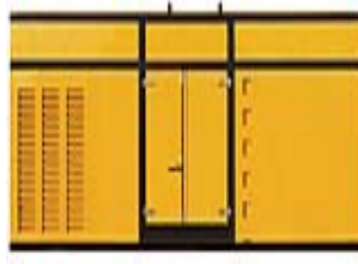


# AC 2250

Cummins  
Stamford  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	2250,00	1800,00	2045,00	1636,00	2955,00

fP GDE GC, ) &

,) & z

fDF DE

%\$!

% %&

GC" \$(\*"

z&(

GC

## Standard Specifications

z

fl

!

E

z

## ALTERNATOR

## TRANSFER SWITCH

# AC 2250

Cummins  
Stamford  
D+' &'

Manufacturer		Cummins		
Model		QSK 60 G4		
		% \$ \$ ' "# "		
		% % \$ \$ ' "		
		Q) * + \$ \$ < D Q		
	L	60,200		
	"	159 x 190		
		14,5:1		
	fl # ı	"# "	1500	
	fl ı	L	280,00	
		L	500,00	
Absorbed Air Discharge ReSource Key.Text	' # "	144,00		
	' # "	2374,00		
fl ' # ı	' # "	336,00		
	° C	450,00		
		24 V d.c.		
	Load	% \$ \$ ı	'+) ı	) \$ ı
	# "	394,00	291,00	200,00


		Stamford
		PI 734 F
	Hz	50
	"	2080,00
7 cg'		0,80
		3
	ı ı	400/230
Temperatur		H

		ı ı		ı ı	
	"	"	"	"	L
AC 2250	15500,00	5676,00	2280,00	2960,00	2000,00
		ı ı		ı ı	
	"	"	"	"	L
AK 99	21100,00	9000	2800	4800	2200

# AC 2250

Cummins  
Stamford  
D+' &'

1 D+' &'

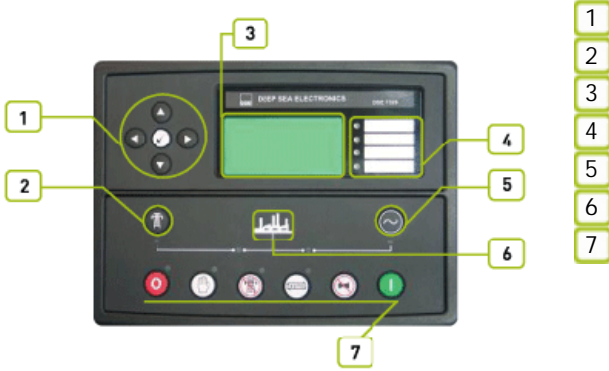

2

8G9ž '+' &ž ( ) 5ž&&š#( š

3

4

5

8G9+' &š ) \$' ž

"8G9+' &š 8G9+' &š

ž

% &1 \* (

žFG' &žFG(, ) ž

ž

# AC 2250

Cummins  
Stamford  
D+' &'

f@#@Bl  
f#@@!@ t

" " " "  
" z " "z " " "

f@#@Bl

971

#

#

#

#

#

6G'9B'\*\$-\$) '\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&)(, t

f&%) +t

f&% \$t

'GA 8'

'!&' "

)

ž

ž

%, !&\$

&(\$)

ž


"

"

# AC 2250

Cummins  
Stamford  
D+ & "

5? -- !'

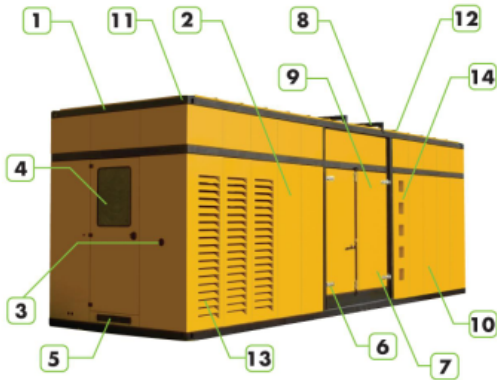

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable exit locations are back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system on the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy.
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2800
fl "L	"	9000
fl "L	"	4800
		2200