

# APD 1000 C

Cummins  
Akso  
D+' &'

**AKSA POWER DIESEL**



ISO8528

GC', ) &-

SZUTEST

GC' - \$\$\$%

CE

2000/14/EC

&\$\$\$#( #

z) \$' z' z' D:

	"	"	"	"	Amp
400/230	1000,00	800,00	920,00	736,00	1329,00

FDGL

GC', ) &

, ) & z

FDGL

%&

GC" \$(\*"

z&(

GC

## Standard Specifications

z

fl

E

z

## ALTERNATOR

## TRANSFER SWITCH

# APD 1000 C

Cummins  
Aksa  
D+' &'



Manufacturer		Cummins		
Model		KTA 38-G2A		
		%\$\$' "# "		
		, -) "		
		0&\$\$< DQ		
	L	38,00		
	"	159 X 159		
		14,5:1		
	fl # ı	"# "	1500	
	fl ı	L	114,00	
		L	280,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	67,00		
	' # "	1500		
	' # "	193,00		
	° C	536		
		24 V d.c.		
	Load	%\$\$ı	'+)ı	)\$ı
	# "	191,00	147,00	98,00

		Aksa
		AK7740
	Hz	50
	"	925
7cg'		0,80
		3
	fl ı	400/230
	A	1337


		fl ı		fl ı	
	"	"	"	"	L
APD 1000 C	7950	4400	2060	2400	900
		fl ı		fl ı	
	"	"	"	"	L
AK 96	11500	7500	2300	2500	900





# APD 1000 C

Cummins  
Akso  
D+' &''

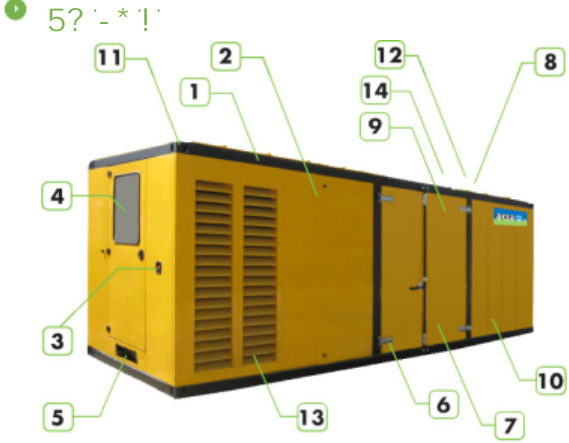

- 1 uY\_l'dfcZ'i j Y'gu, kU'ja U'kU' imW\_Uf\_Ug'mUdi
- 2 uY\_l'gU, kU'ja U'dUbY'Yf'jY'\_UV'b'ci i a i
- 3 Acil durdurma butonu
- 4 ? cblfc'dUbcgi 'Uf\_U'kU'FUZU' UgYnY'a cbkU'i
- 5 ? UV'c', i\_l' i'Uf\_UXUb'j YmU'U'kU'b
- 6 ? cfcncbU'XU'nb'i'\_i'\_]h'j Y'a Yb'kY' Y'Yf
- 7 MU' Vc' U'ra U'a c'cf' nYf]bXY'j UbU'jY
- 8 Egzoz sistemi kabin içinde, gizli
- 9 < Yf'\_]\_kU'FUZU'VU'ia i'\_c'UmU' h'f'Ub'\_]\_h'Yb'YV'j]f' [ Yb' ]'\_Udi'Uf
- 10 MU'\_ihXYdcgi'\_UV'b'b' b'kU'FUZU'XU'Z'Unfi'V'f'\_]\_h'Yb'YV'j]f'\_Udi'jY'i'U' i'if
- 11 ? U'Xifa U'j Y'kU' ra U'bc'\_kU'gi'\_UV'b' nYf]bXY'Z'\_cb'kY'nb'if'a UdUgi' Y'\_]bXY
- 12 Radyatör su dolumu için kapak
- 13 GY'g'mU'i'ha'ia U'nYa Y'Yf]
- 14 HU'j UbU', i'\_]\_]\_b'VUga U'\_a YfX]j Yb